


MGD

MAST GASTIGHT WALL LEAD THROUGH

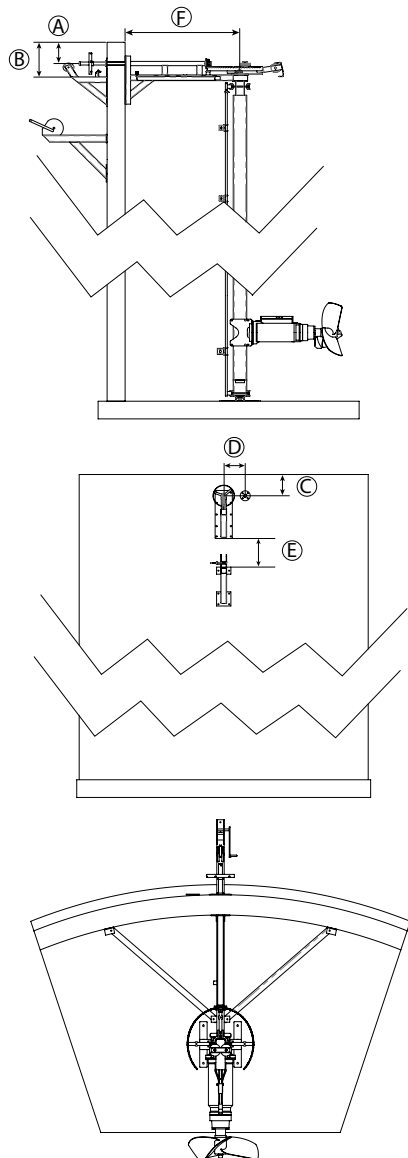

Application

Mounting system for use in a concrete tank with heights up to 46 ft.

Construction

Guide mast 3.9 x 3.9 / 4.7 x 4.7 / 5.9 x 5.9 in ss316
 ss304-cable winch, cable in 2216 (max. tension 1,984 lbs)
 Cable guidance behind the mast

Optional:

Height-indication - to determine the exact height of the agitator within the tank

Angle display - to determine the exact angle of the agitator within the tank

Benefits

- Easy to install
- Safe operations of submersible mixer
- Strong and sturdy construction
- Mixer turnable left / right (total 240°) at any height

Dimensions

Type	A [in]	B [in]	C [in]	D [in]	E [in]	F [in]
MGD	11.8	19.3	11.8	11.8	var.	47.8