
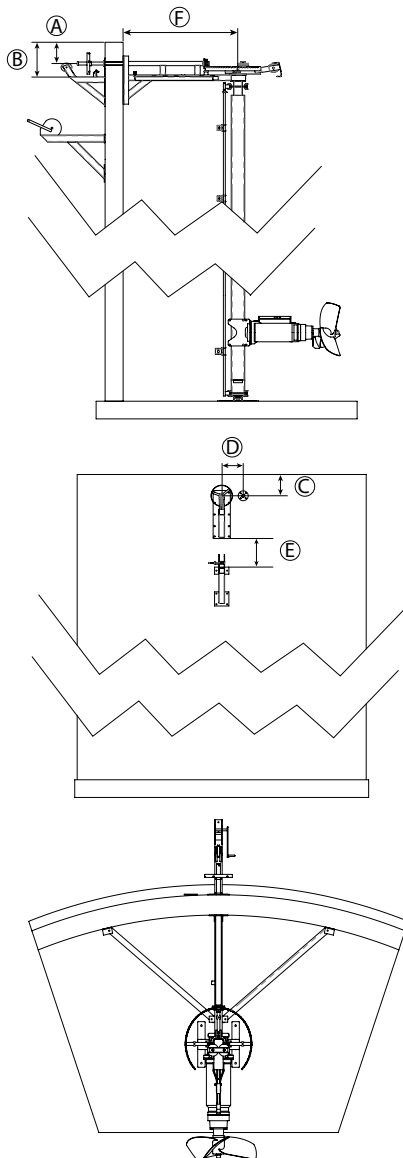


MGD

MAST GASTIGHT WALL LEAD THROUGH

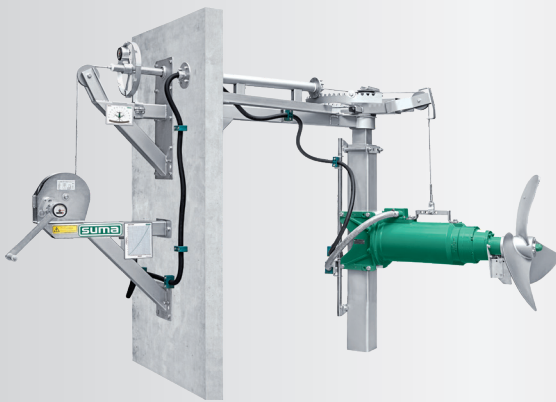

Application

Mounting system for submersible motors in gas tight systems
 The MGD is designed for vertical and lateral adjustment of the motor from the outside of concrete and steel tanks
 Up to 45' tank heights - larger heights on request

Construction

For use with 4" x 4" | 6" x 6" stainless 316 guide masts
 Stainless 304-cable winch with a stainless 316 cable (max. load 1900 lbs)
 Cable management behind the mast with cable clips and strain relief
 Options:
 Height indicator for submerged mixer
 Protractor for lateral setting

Benefits

- Easy to install
- Safe operations of submersible mixer
- Strong and sturdy construction
- Swivel radius ± 105 degrees at any height

Dimensions

Type	A [in]	B [in]	C [in]	D [in]	E [in]	F [in]
MGD	11.8	19.3	11.8	11.8	var.	47.8